

NEW: EASY SETUP WI-FI CONTROL



WI-FI INTERFACE EASY SETUP

The new year started with a fresh new look and user set up for the Wi-Fi Interface. Connecting to Mitsubishi Electric Wi-Fi Control has never been simpler. Users can come home to total comfort by connecting to Wi-Fi Control via a few simple steps on their phone, tablet or PC.

Simple Pairing

The new simple set up for the Wi-Fi Interface is done almost completely via the user's phone or tablet. For those with a WPS router, the traditional WPS Push Pairing can still be used to connect to Wi-Fi Control.

Router Compatibility

The new Wi-Fi Interface can be connected to routers with or without WPS functionality; meaning more users will be able to quickly set up Wi-Fi Control – no matter what router they have.

Discreet Mounting

For improved aesthetics, the new Wi-Fi Interface can be mounted on the outer side of the indoor unit with a special clip and holder that comes with each Interface.

WI-FI CONTROL ALLOWS USERS TO:



Turn Heat Pumps On/Off

View your connected heat pumps and turn on or off at the touch of a button.

Change Temperature

Displays actual room temperature information, allowing you to adjust your heat pump settings to suit the conditions.

Change Modes

Choose from the five operating modes available; Auto, Heat, Dry, Fan, and Cool. This feature allows you to customise your system to meet your needs.

Change Fan Speeds

Specify a fan speed between one and five or allow the system to automatically adjust to the requirements of the area.

Change Airflow Direction


Vane positions provide directional control of airflow from the indoor unit. Choose Auto, Swing, or set a specific direction to target key areas in the room.

Develop Operating Rules

Program your system to automatically turn on/off at specific times, change settings, and develop temperature rules to ensure superior comfort day after day.




SIMPLE PAIRING – FOR NON-WPS MODEMS

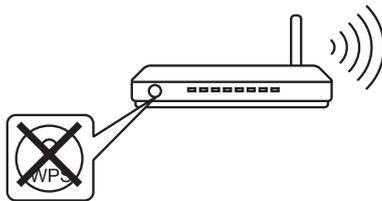

STEP 1


Hold down MODE for 7 seconds, MODE and UNIT lights will flash every 5 seconds.

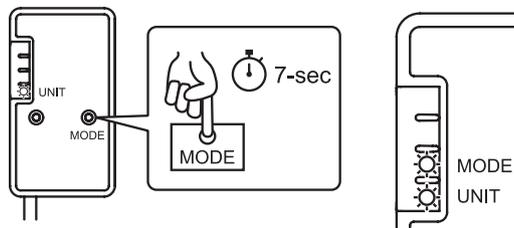

STEP 2

Open the Wi-Fi Networks screen on your phone, and connect to the Wi-Fi Interface's access point.

Look for the Interface's SSID name as a Wi-Fi network to connect to, and enter the KEY as the password.

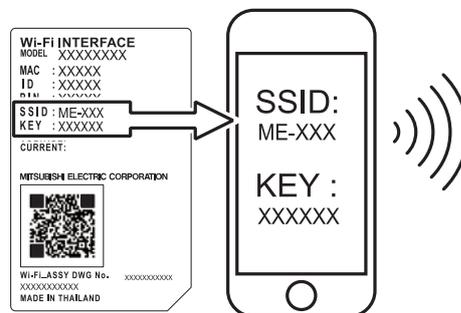

STEP 3

Open the Mitsubishi Electric Wi-Fi Control app and enter your homes Wi-Fi details, password and connect.



STEP 4

Select your model of heat pump in the Wi-Fi Control app, and then control it from your device.



OPTIONAL
Wi-Fi
CONTROL

