

## Refrigerator-Freezer OPERATING INSTRUCTIONS



SERIES MODEL

# MR-HS421EX MR-HGS421EX

Contents		
y Precautions	2-5	
Installation to Operation	6-7	
to Use the Operation Panel	8	
J each compartment tor Compartment / Vegetable case / ase / Select case / Freezer Compartment	9-11	
natic Ice-Maker	12-13	
ming Temperature Adjustment	14-15	
Cleaning		
Other Issues		
Troubleshooting		
Accessories		
	y Precautions Installation to Operation to Use the Operation Panel geach compartment tor Compartment / Vegetable case / ase / Select case / Freezer Compartment matic Ice-Maker ming Temperature Adjustment g sues shooting	

Maintenance work shall only be carried out at workshop by well-trained maintenance worker.

Fire/Flammable refrigerant

R600a

- Please read this manual carefully and follow the information contained within. In particular, be sure to read the safety precautions before using this refrigerator.
- Be sure to receive your copy of the warranty from the retailer and confirm that the purchase date and retailer name are written on the warranty.
- Store this operating instructions manual and the warranty in a safe place.
- This refrigerator was manufactured for refrigerating and freezing of foods in general households. For commercial use, please use a commercial refrigerator-freezer.
- The photographs and illustrations contained in this manual are for the MR-HS421EX. While the appearance of the MR-HGS421EX are different from the MR-HS421EX, the operation is the same.
- The principal plastic components indicate the material name to facilitate recycling.
- The user manual should be handed over to any person who would use or handle the refrigerator whenever the refrigerator would be transferred to another location and delivered to a recycling plant.
- This refrigerator uses flammable foaming gas for insulation. Please deliver the unit to specialized industrial waste dealer when you do away it. Please follow the rules in your country.

## **Cleaning Instruction - Important!**


It is strongly recommended to use only lukewarm water and a soft cloth when cleaning. Cleaning agents can cause cracking to the plastic components of your refrigerator.

## **Safety Precautions**

The following describes the safety precautions to follow in order to prevent injury to the user and others, as well as to prevent damage to property.

WARNING	Improper handling that can result in grave consequences such as death or serious injury.	
	Improper handling that can result in personal injury or damage to your house, household furnishings, etc.	


WARNING




Follow the

Meaning of symbols.

Prohibited

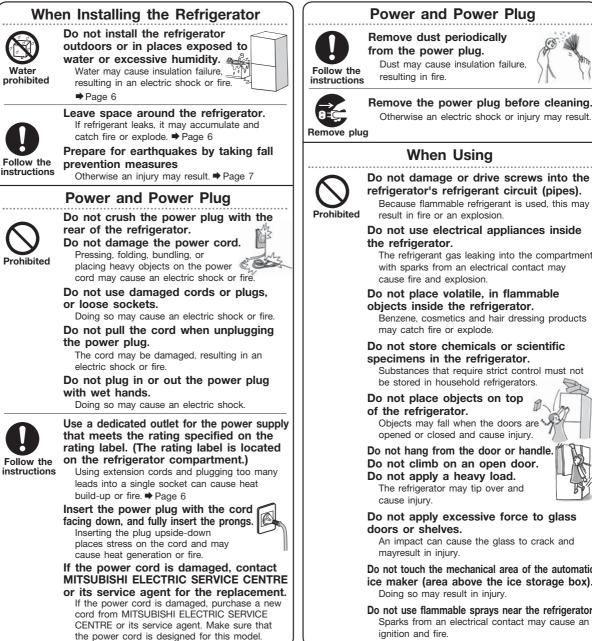

Otherwise an electric shock or injury may result. When Using Do not damage or drive screws into the refrigerator's refrigerant circuit (pipes). Because flammable refrigerant is used, this may result in fire or an explosion. Do not use electrical appliances inside the refrigerator. The refrigerant gas leaking into the compartment with sparks from an electrical contact may cause fire and explosion. Do not place volatile, in flammable objects inside the refrigerator. Benzene, cosmetics and hair dressing products may catch fire or explode. Do not store chemicals or scientific specimens in the refrigerator. Substances that require strict control must not be stored in household refrigerators. Do not place objects on top of the refrigerator. Objects may fall when the doors are opened or closed and cause injury. Do not hang from the door or handle. Do not climb on an open door. Do not apply a heavy load. The refrigerator may tip over and cause injury. Do not apply excessive force to glass doors or shelves. An impact can cause the glass to crack and mayresult in injury. Do not touch the mechanical area of the automatic ice maker (area above the ice storage box). Doing so may result in injury Do not use flammable sprays near the refrigerator. Sparks from an electrical contact may cause an

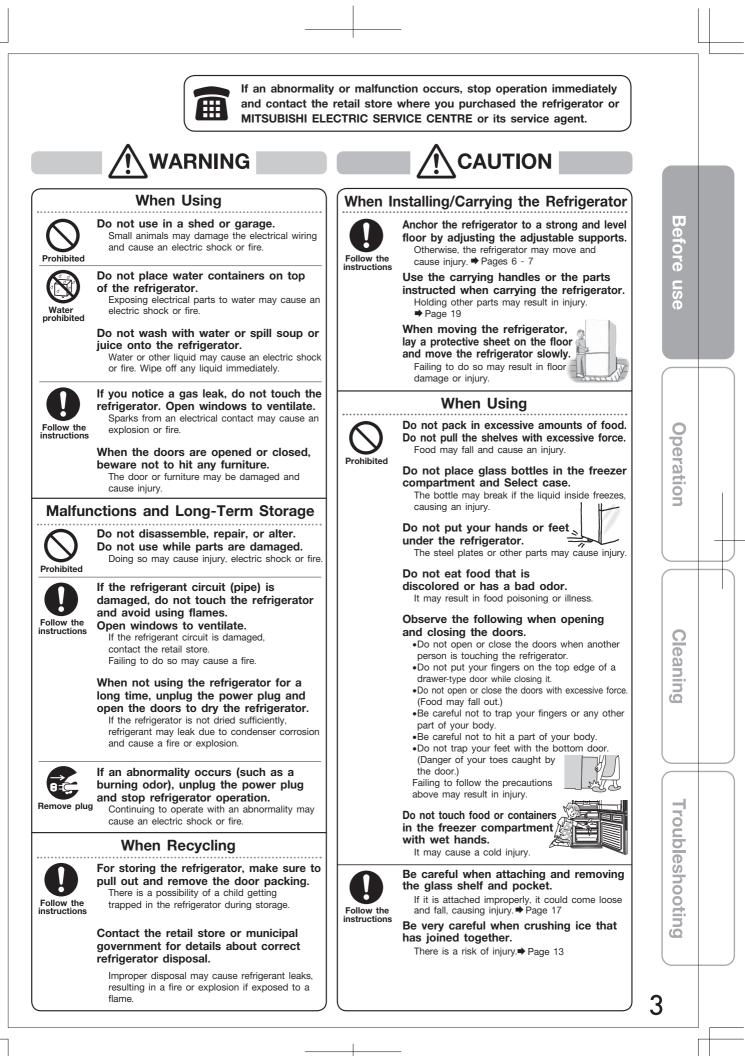

## Safety Precautions (Continued)

- If the power cord is damaged, contact MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent for the replacement.
- WARNING: fill with potable water only.

Δ

- For Installation, Handling & Servicing of the appliance, please refer to section "From Installation to operation", "How to Use the Operational Panel" & "Cleaning".
- WARNING: Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- WARNING: Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- WARNING: Do not damage the refrigerant circuit.
- WARNING: Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- Contact the retail store or municipal government for details about correct refrigerator disposal.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- This appliance is intended to be used in household application only.
- WARNING: When positioning the appliance, ensure the supply cord is not trapped or damaged.
- WARNING: Do not locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.

# Before use

Operation

**R600a Refrigerant Warning** 

- This appliance contains a small quantity of R600a refrigerant which is flammable.
- During transportation and installation, ensure that the tubing of the refrigerant circuit is not damaged.
- Leaking refrigerant can ignite and may damage the eyes.
- In the event any damage does occur, avoid exposure to open fires and any device which creates a spark. Disconnect the appliance from the mains power.
- Thoroughly ventilate the room in which the appliance is located for several minutes.
- Notify MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent for necessary action and advice.
- The room for installing the appliance must be at least 1 cubic metre per 8 grams of refrigerant.

The refrigerant quantity contained in this appliance is noted on the Rating Label of the appliance.


• If your Mitsubishi Electric Refrigerator should require service, please contact MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent.

NOTE: THIS REFRIGERATOR CONTAINS FLAMMABLE HYDROCARBON REFRIGERANT. ONLY SUITABLY QUALIFIED TECHNICIANS SHOULD ATTEMPT ANY SERVICE TO THE REFRIGERATION CIRCUIT OF THIS APPLIANCE. SOME JURISDICTIONS REQUIRE A SPECIFIC HYDROCARBON HANDLING LICENCE FOR SERVICING. PLEASE CONTACT MITSUBISHI ELECTRIC SERVICE CENTRE OR ITS SERVICE AGENT FOR ASSISTANCE.

|| Troubleshooting

Cleaning

## From Installation to Operation

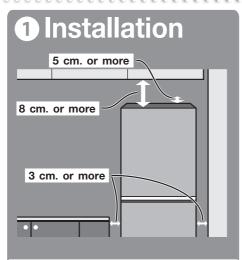

## Install the refrigerator in the following kind of location.

- A place with good ventilation and not exposed to direct sunlight or hot air
   To keep good cooling performance and reduce power costs.
- A place with low humidity To prevent it from rusting.
- A strong and level place
   To prevent vibration, noise, and ajar or tilting doors.
  - To prevent deformation or discoloration of the floor materials due to the weight or heat. \*If the floor materials are carpets, tatami mats, wooden floors, PVC floors, etc. and may deform or discolor, lay a strong plate or board underneath.
- A place away from other devices
   To prevent noise or video interference
   with devices such as televisions.
- There should be at least 3 cm of space on both the left and right sides, at least 8 cm of space above and at least 5 cm of space back.

To allow heat to dissipate from the top, the back and the sides of the refrigerator.



Do not install the refrigerator outdoors or in places exposed to water or excessive humidity. Water may cause insulation failure, resulting in an electric shock or fire.



Leave space around the refrigerator. If refrigerant leaks, it may accumulate and catch fire or explode.

## Connect the Power Supply

\* Connect power supply soon after installing the refrigerator



Turn on the power of the refrigerator as soon as possible.

The refrigerator will not be damaged even if you turn on the power immediately after the installation.

#### • Use a dedicated outlet

Use a dedicated outlet for the power supply that meets the rating specified on the rating label. (The rating label is located on the refrigerator compartment.)

#### – \land WARNING –

Using outlets that do not meet the specified rating or plugging in too many leads into a single socket can cause heat buildup or fire.

• The refrigerator will not be damaged even if the power is supplied soon after installation. It takes a while for the refrigerator to cool, therefore supply power as soon as possible.


#### • Electrical Connections

Make sure this unit is properly grounded.

- The refrigerator should always be plugged into its dedicated electrical outlet. This will provide the best performance and prevent electrical circuits from being overloaded and causing a fire. Make sure that the electrical outlet provides the proper voltage. Extension cords are not recommended.
- If your refrigerator is installed in a high humidity location, not only ground connection but also installation of the earth leakage breaker is recommended.
- If the power cord is damaged, purchase a new cord from MITSUBISHI ELECTRIC SERVICE CENTRE. Make sure that the power cord is designed for this model.
- If the power cord is damaged, contact MITSUBISHI ELECTRIC SERVICE CENTRE for the replacement, in order to avoid a hazard.

## How to remove the energy label

- Remove the energy label carefully. A glue residue may remain, particularly if the label has been in place for a long period of time.
- Apply either Eucalyptus or Tea Tree oil directly on any residue.
  Do not allow the oil to run or drip onto plastic parts as it may
- Allow the oil to sit for approximately 1-2 minutes, or until the
- glue residue has softened.
- Wipe off with a damp cloth.
- If any residue remains, repeat the above process.
- Rinse with clear water.
- Dry thoroughly.

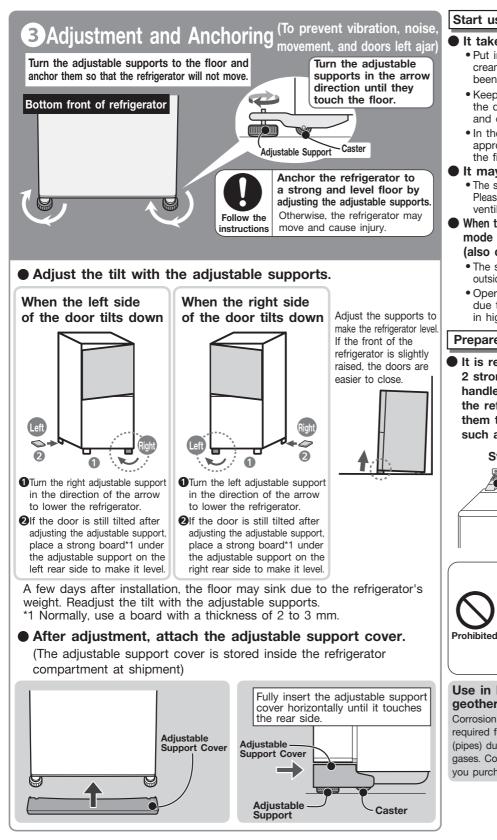

## Start using

It takes time to cool down. • Put in warm food items or ice cream after the refrigerator has been adequately cooled down.

UU

efore use

Operation

Cleaning

- · Keep opening and closing of the door to a minimum, and open in a short time.
- In the summer, it will take approx. 24 hours to make the first batch of ice.
- It may smell of plastic. • The smell will gradually disappear. Please ensure room is adequately ventilated to remove odors.
- When the refrigerator is in cooling mode the following may occur (also occurs during summer).
  - The side will be hot allowing the outside of the refrigerator to cool.
  - Operating noise will be loud due to the compressor being in high-speed operation.

#### **Prepare for Earthquakes**

It is recommended to pass 2 strong belts through the handles on the top rear of the refrigerator and anchor them to a strong location, such as a wall or post.

# Strong Belts


Do not damage or drive screws into the refrigerator's refrigerant circuit (pipes).


Because flammable refrigerant is used, this may result in fire or an explosion.


#### Use in hot spring and geothermal areas


Corrosion control treatment may be required for the refrigerant circuit (pipes) due to generation of corrosive gases. Contact the retail store where you purchased the refrigerator.


Troubleshooting

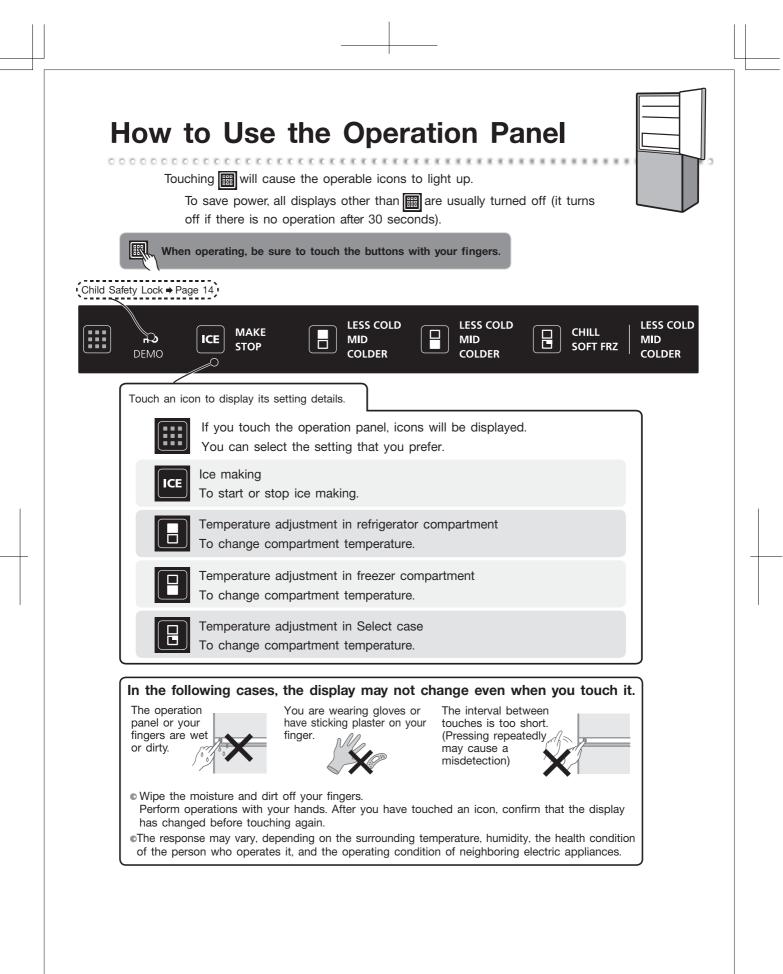


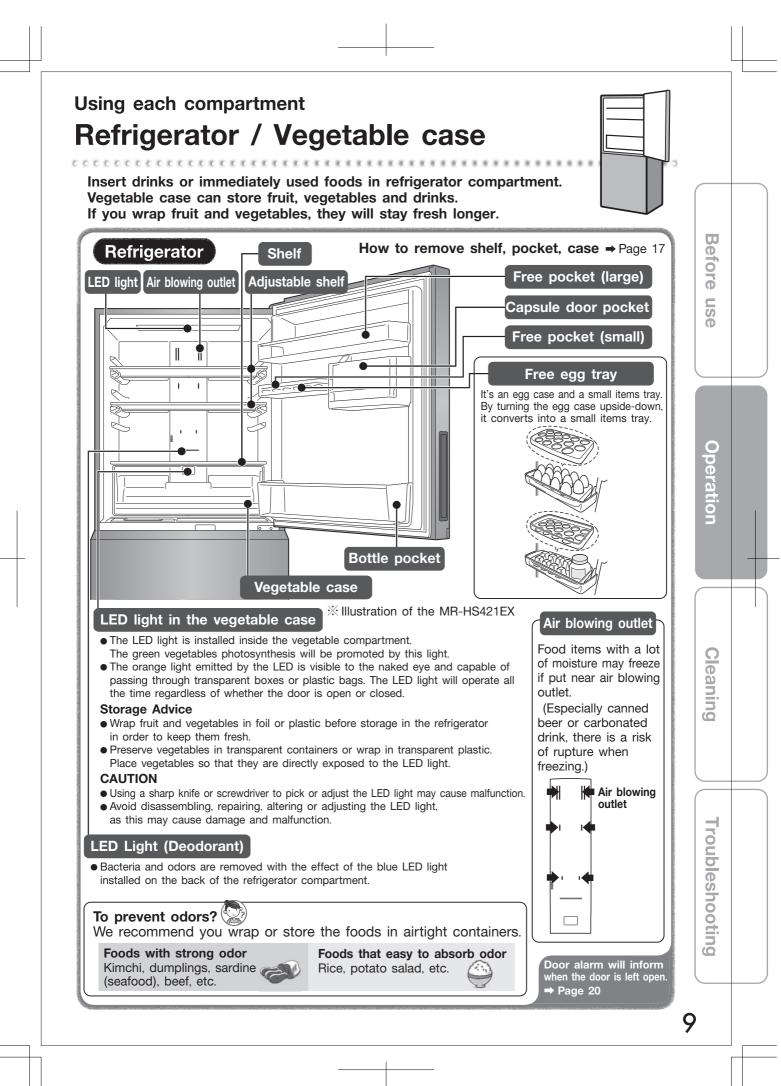


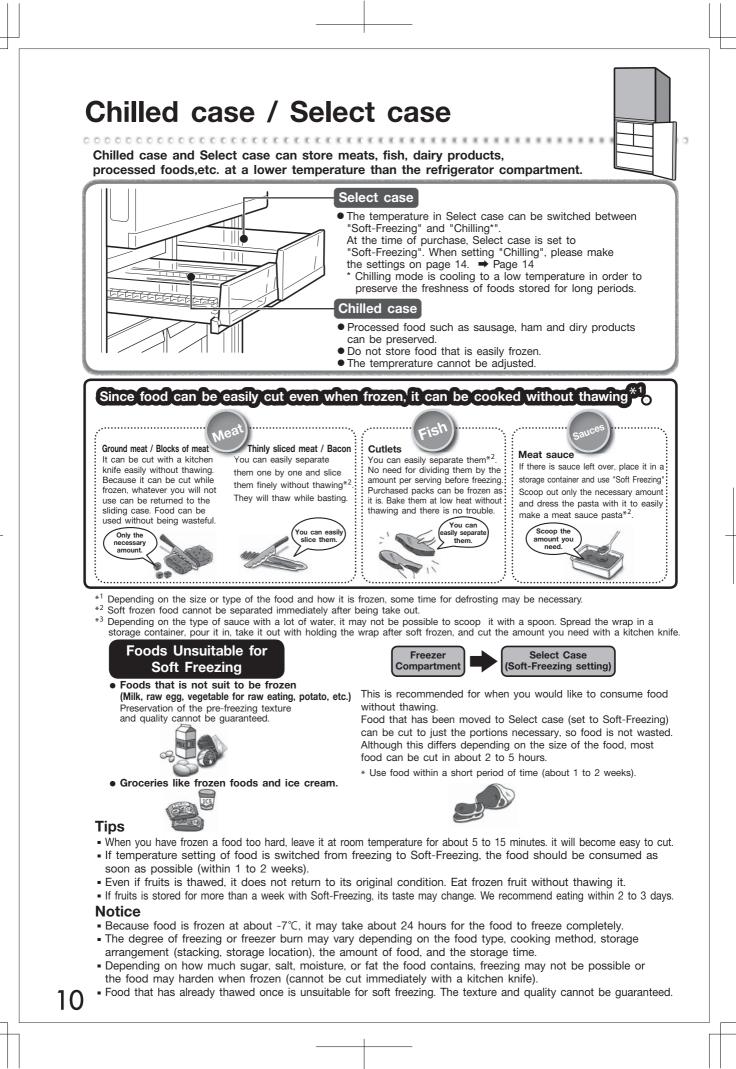

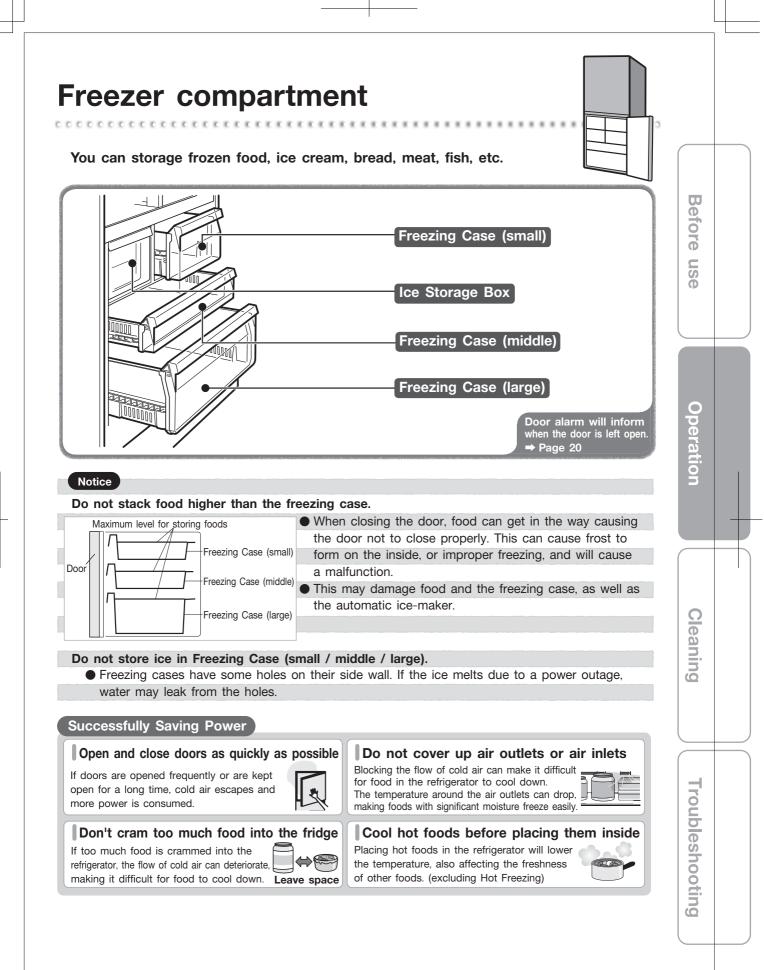

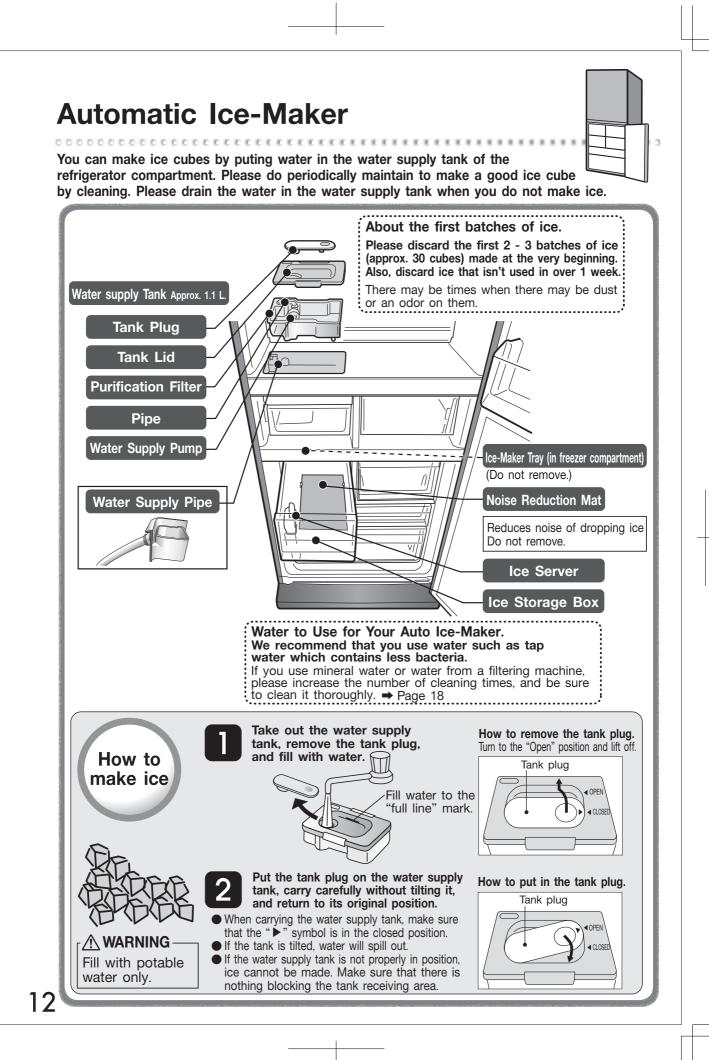

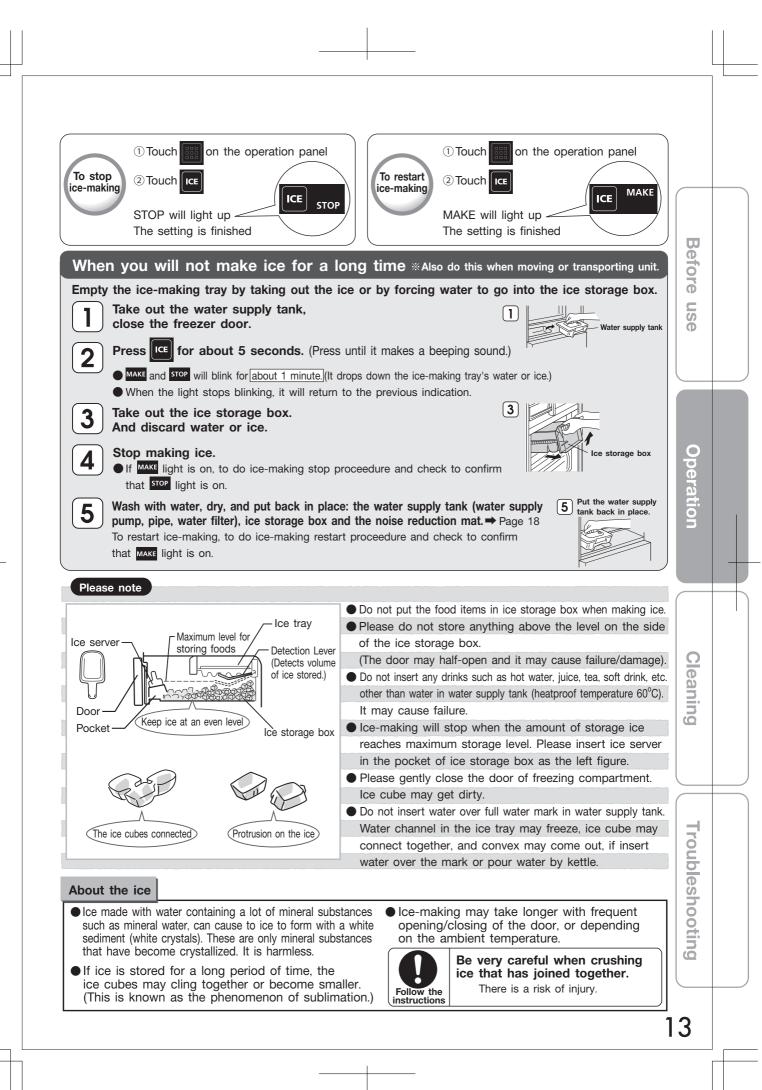

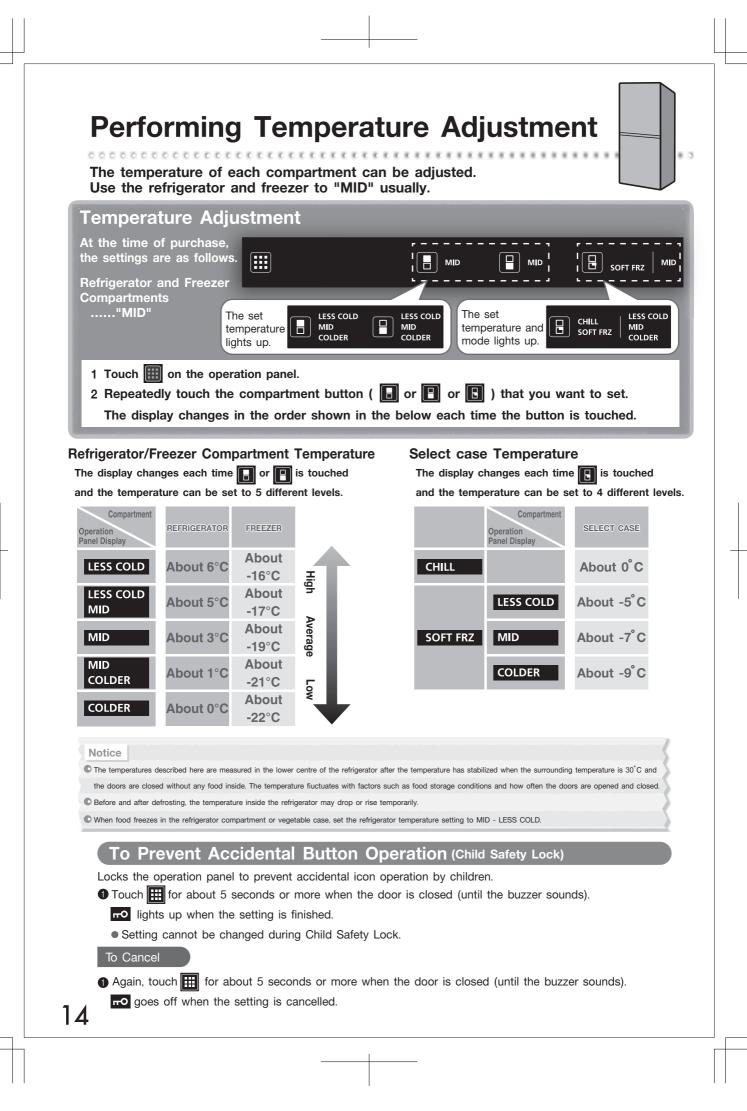


# Other Issues (Temperature Fine Adjustment Mode, When DEMO Lights Up)

To Control the Temperature More Precisely (Temperature Fine Adjustment Mode)

The temperature can be set to 11(6 for Select case) different levels for the refrigerator compartment, freezer compartment and Select case.

When temperature fine adjustment mode is set, displayed letters blinks about every 10 seconds.

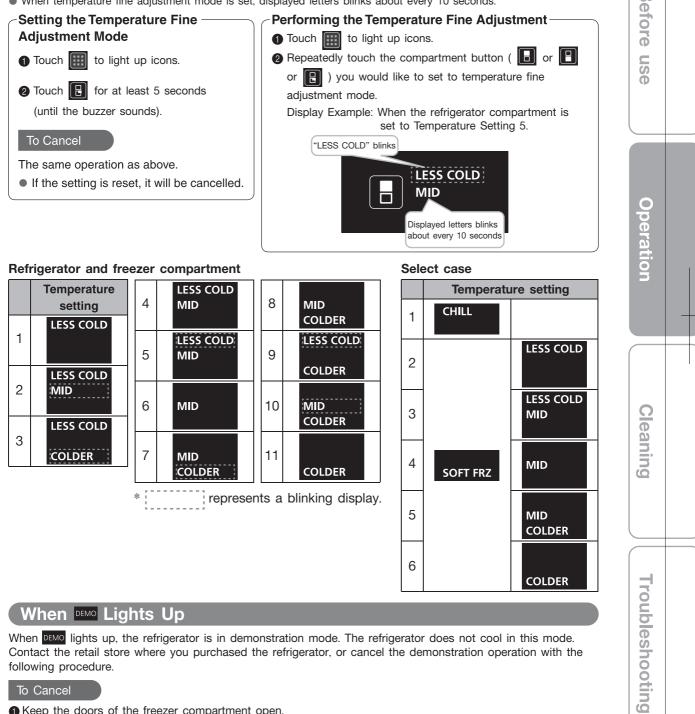

## When DEMO Lights Up

When DEMO lights up, the refrigerator is in demonstration mode. The refrigerator does not cool in this mode. Contact the retail store where you purchased the refrigerator, or cancel the demonstration operation with the following procedure.

#### To Cancel

**1** Keep the doors of the freezer compartment open.

- 2 Light up the icons and press ICE, B and B at the same time for at least 5 seconds.
- 3 Check that DEMO is turned off.
  - The demonstration mode was not cancelled if it lights up.

## **Cleaning** Removing and Cleaning the Parts



Remove the power plug before cleaning.


Otherwise an electric shock or injury may result.



Do not disassemble, repair, or alter. Do not use while parts are damaged. Doing so may cause injury, electric shock, or fire.

After cleaning, wait at least 10 minutes before reinserting the power plug into the socket. If you insert the plug immediately, there will be an overload on the machine.

#### How to Clean Q&A

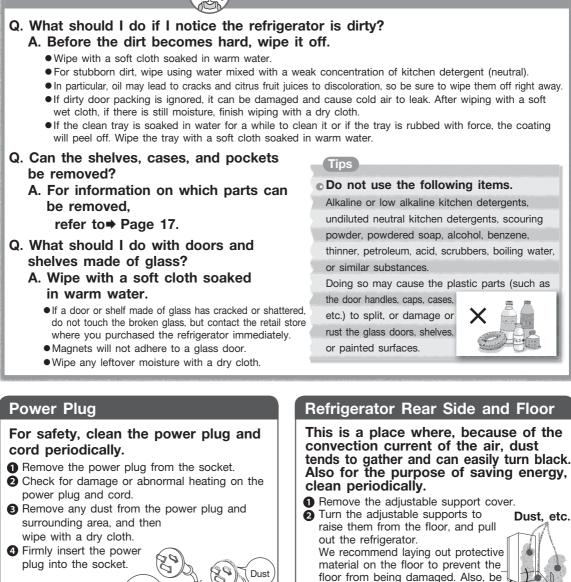

(Damageo cord Replace

Dust may cause insulation failure,

the power plug.

resulting in fire.

Remove dust periodically from

Clean



Output Check for water dripping on the floor. Do not put your hands under the refrigerator. It may cause injury.


careful not to injure yourself.

wipe off all dirt.


Prohibited

B Remove dust from the refrigerator's

rear side, the wall, and floor, and

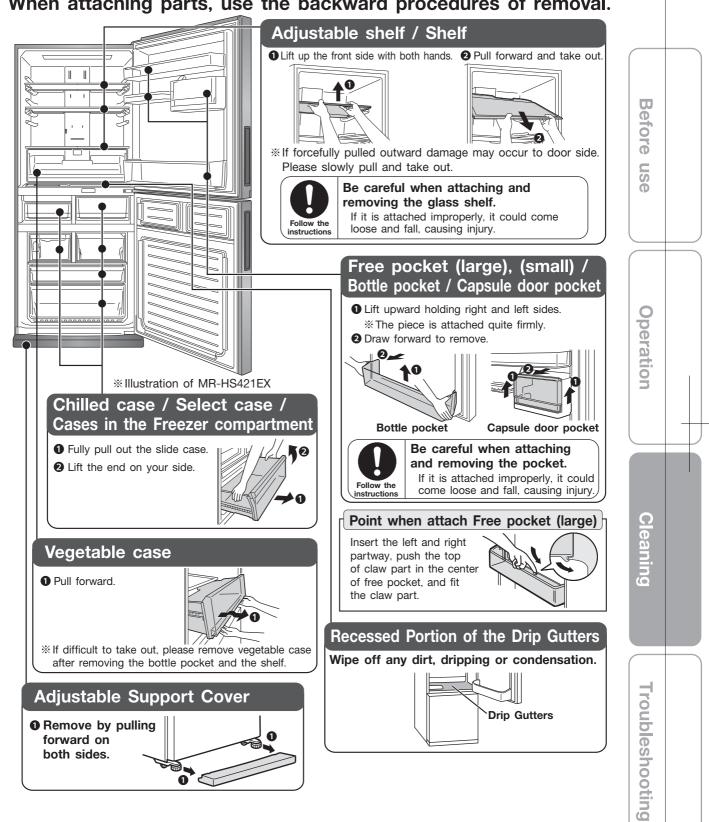

When attaching parts, use the backward procedures of removal.

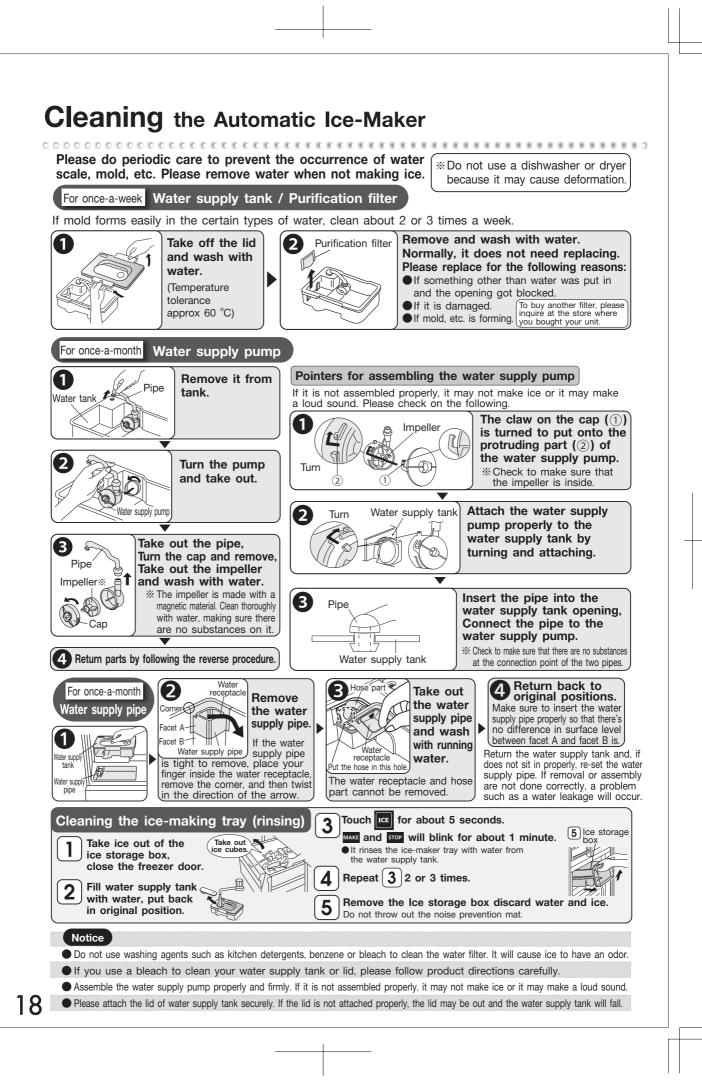

Minimize	r Outages	
	the frequency of opening the doors, and avoid adding more food. n panel settings other than the temperature settings may change. Check the settings. (Child Safety Lock, etc.)	
When	Not Using the Refrigerator for a Long Time (When the Power Plug Is Unplugged)	
	he "STOP" ice making mode.  Page 13 that stop is lit.	etor
2 Remove	the power plug.	,e U
Wash tl soundp	any water or ice from the water tank, and ice storage box and clean. ne water tank, water supply pump, tank pipe, tank cap, lid, water supply pipe, ice storage box, roof mat, and ice server, dry them completely, and then return them to their original positions. es 13, 18	JSe
• Do no	t dispose of noise reduction mat.	
* If the r	he interior of the refrigerator and open the doors for 2 to 3 days to dry the inside. A frigerator is not dried sufficiently, it may cause mold, odors, or refrigerant (gas) leaks due to condenser corrosion.	ı.
• Wash t	ne water tank, water supply pipe, and before making ice for the first time, or if you have not made	
	more than a week, Odors or dust may be adhering to the parts.	С
	insport the Refrigerator	
	any water or ice from the water supply tank and age box. ➡ Page 18 Drainage port	peration
	rotective gear (gloves).	on
adjusta	ble supports.	
5 Lay tov	e the power plug. vels under the drainage port and the lower rear edge of the	
	ator, and position a container or tray with a height of about n the towels to collect the water.	
	wels prevent floor damage, and water from being spilled on the floor. refrigerator slowly to the rear by about 30 degrees, and drain	
the wat	er from the evaporation tray via the drainage port on the lower e. (The evaporation tray is not visible from the outside.)	C
* Becau	ise the refrigerator is heavy, the work must be performed by at 2 people.	0
* The v	rork must not be performed by small children or people	anır
Ask a	specialist transportation company. Handles on rear	- Bu
rear up	bersons should grasp the bottom handles and the handles on upper side upper side	
be da	t lay down the refrigerator on its side. (The compressor may maged.)	
Frost	Transportation Time Is Long, for Example When Moving House from the condenser inside the freezer compartment will melt, and may spill water when rigerator is transported. It may take 1 day to defrost after unplugging the power plug.	
	Do not damage the refrigerator's Wear protective gear when you	roc
	refrigerant circuit (pipes). Because flammable refrigerant is used,	
()		Š.
Prohibited	this may result in fire or an explosion. Follow the instructions May result in floor damage or injury.	
	instructions Not following these instructions may result	l roubleshooting

## Other Issues (Door Alarm, mo Mark)

#### When the Door Alarm Sounds (Door Alarm)

The door alarm (with alarm sound and compartment display) is activated when a door is open for 1 minute or longer. The pattern of the door alarm sound and the action of compartment display area are as follows depending on how long the door has been left open.

Time for which the door left open	1 minute	2 minutes	3 minutes	4 minutes
Alarm sound	4 short beeps, then 2 beeps	4 short beeps, then 3 long beeps	4 short beeps, then 4 long beeps	After 4 short beeps, Continuous long beeps
Compartment display area The compartment display area will blink in synchronization with the alarm sound			vith the alarm sound	

## Compartment display area (Operation panel)

Blinks in synchronization with the alarm sound.

 Check that the doors are not left ajar or do not have any food trapped (the packing, the back of the drawer cases). (Check at least once a month.)

Refrigerator and Freezer doors have an opening and closing sensor.

## When the Alarm Cannot be Turned Off

Check that there are no gaps between the door.

When the alarm cannot be turned off, there may be a malfunction and an inspection is required. Contact the retail store where you purchased the refrigerator.

 $\sim$  To Stop the Alarm (Continuous Short Beeps) —

The alarm can be temporarily stopped in the time before the refrigerator is repaired.

Press ICE for at least 5 seconds.

\* If performing the above operation does not turn off the alarm, or the alarm periodically sounds, check peripheral machinery as well.


## **mO** When the Mark Blinks Rapidly (About 5 Times per Second)

When the refrigerator will not cool, there may be a malfunction and an inspection is required. Contact the retail store where you purchased the refrigerator.

## Troubleshooting

Before contacting MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent or making a repair request, check the following.

If the problem persists, contact the retail store where you purchased the refrigerator as soon as possible. Frequently asked questions in the initial period and in summer

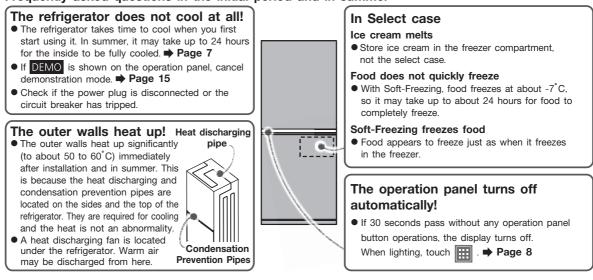

## Troubleshooting (continue)

	Problem	Check	Explanation and Action
	oes not cool vell	Has enough time passed after installation?	It takes 4 to 5 hours for the refrigerator to cool, and may take 24 hours in summer to fully cool.
	lot much ice is	Is the temperature setting set to "LESS COLD"?	Set to "MID or COLDER" or to the setting of your liking.
n	nade		➡ Page 14
	ce melts	<ul> <li>Is the flow of cold air being blocked? Are the doors being opened frequently, or left ajar? Is food blocking them?</li> <li>Is heat discharging being blocked?</li> </ul>	Make space between foods and remove any food that is sticking out of shelves or touching the ceiling of the drawers. Avoid opening and shutting the door for a while Check that there is enough space around the refrigerator
		Check if there is no gap around the refrigerator and the refrigerator is exposed to direct sunlight.	and that it is properly installed.   Page 6
F	ood freezes in	Is the temperature on the operation panel set to "COLDER"?	Set the temperature to "MID". Also, the temperature with each setting may temporarily decrease.
	he refrigerator ompartment and egetable case	Is food with a lot of moisture stored at the rear of the shelf?	
		Is the surrounding temperature 5°C or less?	Food in the refrigerator compartment or vegetable case may freeze. Freezing is less likely when the temperature settings are set to "LESS COLD". <b>Page 14</b>
) F	ood in the elect case	Is food piled up in the upper area?	Leave a gap so that cold air can flow to the ceiling and between food.
n	nelts	Has enough time passed after installation?	The refrigerator takes time to cool completely.
S	oft-Freezing	Is the select case set to "SOFT FRZ • COLDER"?	Set the select case to "SOFT FRZ ● MID". ⇒ Page 14
Soft-Freezing freezes food too hard		Observe and the contain a lot of moisture?	Foods containing a considerable amount of moisture may freeze too hard. We recommend leaving the food for about 5 to 15 minutes, placing the other hand on the back of a knife, and cutting the food by pushing on it. Also, use the setting "SOFT FRZ • LESS COLD".
		Is food freezing the same way as with "Freezing"?	Food appears to freeze in the same way as with "Freezing".
, c v	Cannot make ice Vater in the tank	Has enough time passed after installation?	It takes 4 to 5 hours for the refrigerator to cool, and 24 hours or more in summer to make ice.
same level		Has food, the ice server, or another object been left in the ice storage box? Also, has the ice been leveled?	Remove food or other objects from the ice storage box. The ice storage box is judged to be full of ice. Also, spread the ice out flat all the way to the front.
		Is the ice making setting for the ice making compartment set to "ICE STOP"?	Set the ice making compartment's setting to MAKE . Page 13
V Q		Are the water supply pump and tank pipe installed correctly onto the water tank?	
V o p	Vater tank r water supply ipe freezes	Are the water supply pipe and water tank installed to the refrigerator without any gaps? Additionally, is the tank pipe installed to the water tank without any internal gaps?	Check the installation around the water tank. If there are gaps, the cold air may escape and water may freeze. → Page 18
	ce is small or bined together	Has ice been stored inside the ice storage box for a long time?	Ice stored inside the ice storage box for a long time may shrink or join together (due to a phenomenon called sublimation). When not using ice, it is recommended that you remove the water and stop the ice making.
		② Does it occur when the water in the water tank is decreasing?	As the water in the water tank decreases, the amount of supply water is slightly reduced.
T	he operation anel does not	Is no lit?	Cancel the Child Safety Lock. ⇒ Page 14
r	espond	Are the user's fingers or the operation panel wet or dirty?	Wipe off the moisture and dirt on the operation panel and fingers.
F	по	Are you repeatedly touching it?	Let your finger off the operation panel once and then touch it again. It will respond when you let you finger off.
		<ul><li>Are seals and tapes put on the operation panel?</li><li>Are there any towels, plastic bags,</li></ul>	Remove the seals and tapes.

## Troubleshooting (continue)

000	0000000000		* * * * * * * * * * * * * * * * * * * *		
	Problem	Explanation and Action			
Sound	There is a rattling sound	• Are any nearby objects in contact with the refrigerator?	Leave space around the refrigerator. When objects or walls are in contact with the refrigerator, sounds may be heard.		
	Loud noises Worrisome noises (Noises	The noise gets louder suddenly or the tone changes.	Immediately after beginning use, when the weather is hot, when the doors are frequently opened and closed, and in similar situations, the refrigerator switches to high-speed operation and cools with high power.		
	described on the right are normal)	A whistling sound is made after closing a door.	This is the sound of the cooling fan motor starting.		
		A whipping or dripping sound is sometimes heard from inside the refrigerator after a door is opened.	This is the creaking sound as warm air enters and expands the plastic.		
		Sometimes the sound of flowing or boiling water can be heard.	This is the sound of the refrigerant (gas) flowing.		
		A rattling or squeaking sound is made sometimes (every 1 to 2 hours).	This is the sound of the automatic ice maker. Even when there is no water in the water tank, the automatic ice maker and pump make a sound about every 100 minutes.		
		6 After turning on the power, a thumping or creaking sound may be heard in the ice making "ICE STOP" mode (every 1 to 2 hours).	This is the sound of the operation check. The check is performed even in the "ICE STOP" ice making mode.		
Door	Doors do not close Doors open	Is a door making contact with food or a case? Is too much food packed inside?	Store food so that the door does not make contact with the food when closed. In the refrigerator compartment, store food on the shelves and in the drawer doors store food so that it does not make contact with the ceiling when doors are shut and opened.		
	easily	As food fallen behind a case in a drawer door, or is the power cord or another object trapped between the refrigerator and a door?	Remove any objects. Make sure that the door does not trap objects such as food, power cords or plastic bags.		
		Is the refrigerator installed stably? Are the adjustable supports making contact with the floor?	Lower the adjustable supports to raise the front side slightly and make the doors easier to close. <b>⇒ Page 7</b>		
	When close the door, another door opens.	This is normal. Since each compartment is connected by a passage of cold air, the wind p of closing the door may cause other doors to open or float for a moment.			
	The alarm will sound	Check if the doors are closed.	Refer to "When the door alarm sounds" and "When the alarm cannot be turned off". <b>→ Page 20</b>		
Condensation/ Frost	Condensation forms on the outer walls and inside the refrigerator	Are the doors being opened frequently, or are there any gaps?	Close the doors so that there are no gaps. When moisture in the air cools, it forms frost or condensation. When there is high humidity, condensation or frost will form even in very small gaps. Regarding the Vegetable Compartment. ➡ Page 9		
ondensat	Frost forms in the freezer compartment Water drips onto the floor	Is the humidity high, for example is it raining?	Condensation may form temporarily. Wipe off with a dry cloth. Condensation may cause frost to form in the freezer compartment. Please minimize the time when doors are kept open.		
Others (	There are lines like scratches on the clear parts	Is it a thin line without level difference on its both sides?	This is a mark created at the time the plastic is molded. It is created at the joint where resin flows. This is not a flaw.		
Oth	There are holes in the door and the refrigerator walls	Are there small holes in the door or in the refrigerator walls?	These are holes that let air escape for the injection of foam heat insulating materials in the manufacturing process. These are not flaws or abnormalities.		
	The surface of the sides or doors is warped	Does the light reflected on the surface appear distorted?	Warping and surface waviness occurs in the manufacturing process. When light hits the surface, it may appear warped, but this is not an abnormality.		
	Noise interferes with televisions	• Is the refrigerator installed near an electronic device such as a television?	Install the refrigerator away from electronic devices such as televisions.		
	or other devices	Is the power to the refrigerator supplied from a socket near the entry hole of the antenna cable?	Use separate power. When using a 2 pin plug, use grounding.		
	There is a bothersome smell (Food / Ice)	Have you placed food with strong odor inside the refrigerator without sealing it in a container?	Store food with strong odor in packaging. The odor may not be removed with a deodorizing apparatus.		

## Accessories

	Model name	MR-HS421EX	MR-HGS421EX
	Accessories	Quantity	Quantity
t.	Adjustable shelf	2	2
	Shelf	1	1
tmei	Vegetable case	1	1
Refrigerator compartment	Water supply tank (including purification filter)	1	1
r co	Free pocket (large)	1	1
erato	Free pocket (small)	1	1
efrige	Capsule door pocket	1	1
č	Free egg tray	1	1
	Bottle pocket	1	1
	Chilled case	1	1
	Select case	1	1
t	Freezing case (small)	1	1
rtme	Freezing case (middle)	1	1
mpai	Freezing case (large)	1	1
Freezer compartment	Ice storage box	1	1
	Noise reduction mat	1	1
	Ice server	1	1
	Adjustable support cover	1	1

This appliance is designed for use in Australia and New Zealand only and cannot be used in any other country. No service is available outside of Australia and New Zealand.

MODEL NAME	COUNTRY NAME
MR-HS421EX/HGS421EX-A	AUSTRALIA / NEW ZEALAND

#### When you hear noise from the lower rear of the refrigerator

• Part of the cooling system is the compressor, which operating, does create a more noticeable increase in noise level. This is normal. However, if the noise is quite loud, this could be because the refrigerator is not installed correctly on a hard level surface, or there may be a problem that may need service.

## CAUTION

1. This appliance is designed for use in ambient temperature listed below.

MODEL NAME	AMBIENT TEMPERATURE RANGE	CLIMATIC CLASS
MR-HS421EX, HGS421EX-A	16 °C ~ 43 °C	Т

The internal temperatures could be affected by such factors as the location of the refrigerating appliance, ambient temperature and the frequency of door opening, and, if appropriate, a warning that the setting of any temperature control device might have to be varied to allow for these factors.

A rise in temperature of the frozen food during manual defrosting, maintenance or cleaning could shorten the storage life.
 Food to be frozen is not to be placed in direct contact with food in storage and, if appropriate, that it could be necessary to reduce the quantity to be frozen if freezing every day is anticipated.

4. The electrical power failure for 1-2 hour will only slightly affect the inside temperature. However, opening and closing the door results in temperature loss. In case there is more than 24 hours electrical power failure, the food should be taken out from the fridge.

5. In case you are leaving or there is no food in the fridge for more than 3 weeks. The fridge should be unplugged and cleaned.

Operation Cleaning

**Troubleshooting** 

23

Before

use



If an abnormality or malfunction occurs, stop operation immediately and contact the retail store where you purchased the refrigerator or MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent.

## SOLE AGENT in Australia

MITSUBISHI ELECTRIC AUSTRALIA PTY LTD. (Incorporated in New South Wales) ABN 58 001 215 792 348 Victoria Road, Rydalmere NSW 2116 For more information and support contact www.mitsubishielectric.com.au Call 1300 651 808

#### SOLE AGENT in New Zealand BLACK DIAMOND TECHNOLOGIES LIMITED (BDT) Wellington Office (Head Office) 1 Parliament Street Lower Hutt PO Box 30772 Phone: (04) 560 9147, Fax: (04) 560 9133 Auckland Office Unit 1, 4 Walls Road Penrose PO Box 12726 Phone: (09) 526 9347, Fax: (09) 526 9348 Christchurch Office 44 Halwyn Drive Hornby PO Box 16904 Phone: (03) 341 2837, Fax: (03) 341 2838

## MITSUBISHI ELECTRIC CORPORATION

NZ79G056H01