
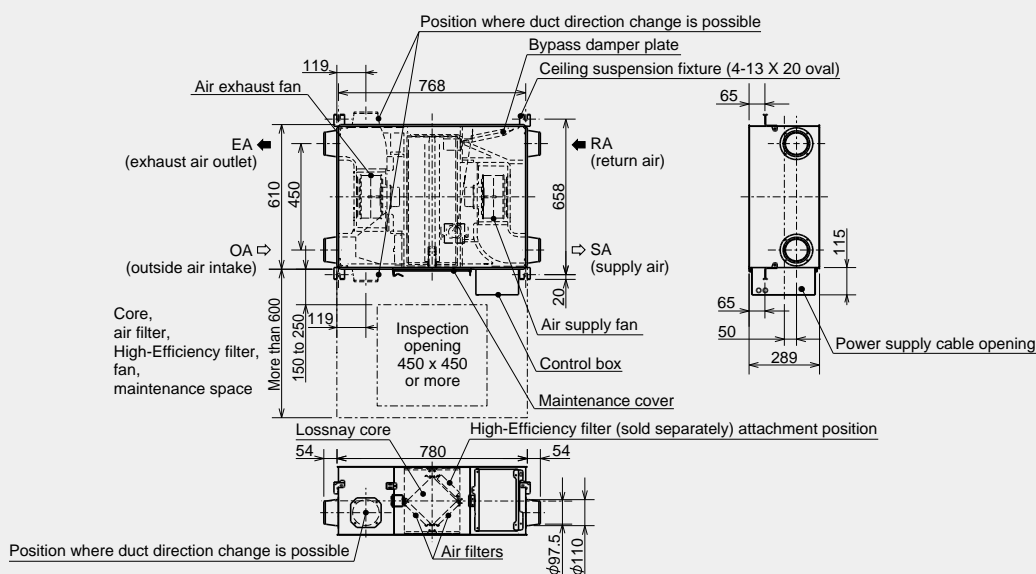


Model		LGH-15RVX-E							
Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		0.40	0.24	0.15	0.10	0.41	0.25	0.15	0.10
Input power (W)		49	28	14	7	52	28	14	8
Air volume	(m <sup>3</sup> /h)	150	113	75	38	150	113	75	38
	(L/s)	42	31	21	10	42	31	21	10
External static pressure (Pa)		95	54	24	6	95	54	24	6
Temperature exchange efficiency (%)		80.0	81.0	83.0	84.0	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	73.0	75.5	78.0	79.0	—	—	—	—
	Cooling	71.0	74.5	78.0	79.0	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of unit in an anechoic chamber)		28.0	24.0	19.0	17.0	29.0	24.0	19.0	18.0
Weight (kg)		20							

\*The Air outlets noise (45° angle, 1.5meters in front of the unit) is about 13dB greater than the indicated value. (at Fan speed 4)

\*The running current, the input power, the efficiency and the noise are based on the rating air volume, and 230V/50Hz.

\*For the specification at the other frequency contact your dealer.

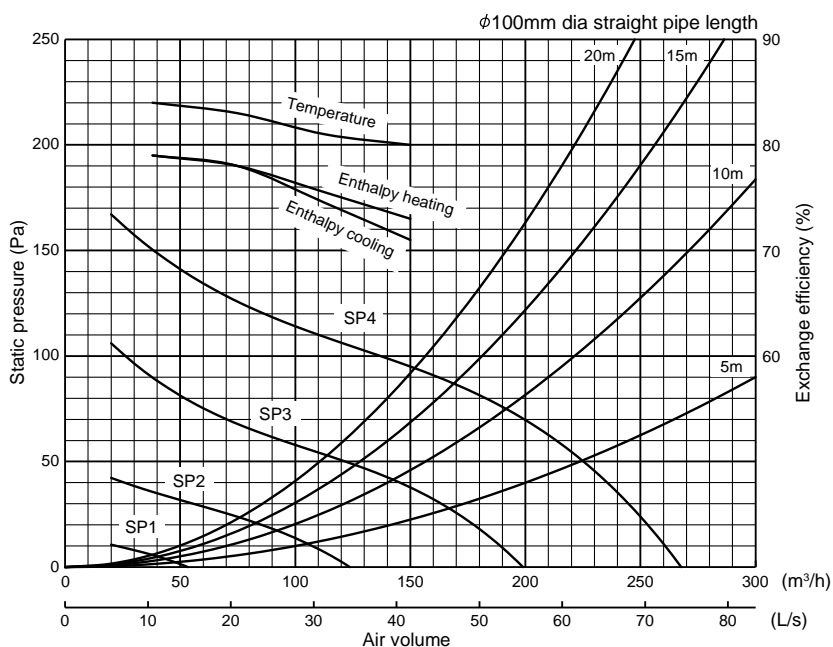

Unit: mm